


FLEX-6 NANO Integrated EtherCAT® Controller

INTRODUCTION


Flex-6 Nano is a powerful, flexible and compact DIN-rail mounted motion coordinator, controlling up to 64 stepper and servo axis.

Flex-6 Nano can be used as a stand-alone controller or it can easily «plug» straight into the EtherCAT Flexslice Architecture, including servo and stepper drives and I/O modules.

THE FLEXSLICE ARCHITECTURE

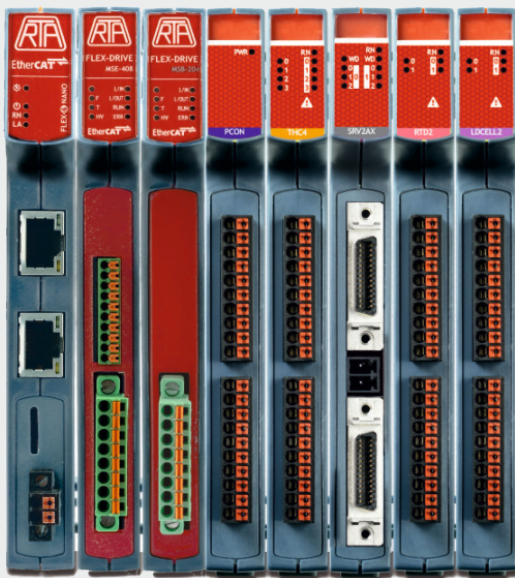

NO NEED FOR EtherCAT COUPLER

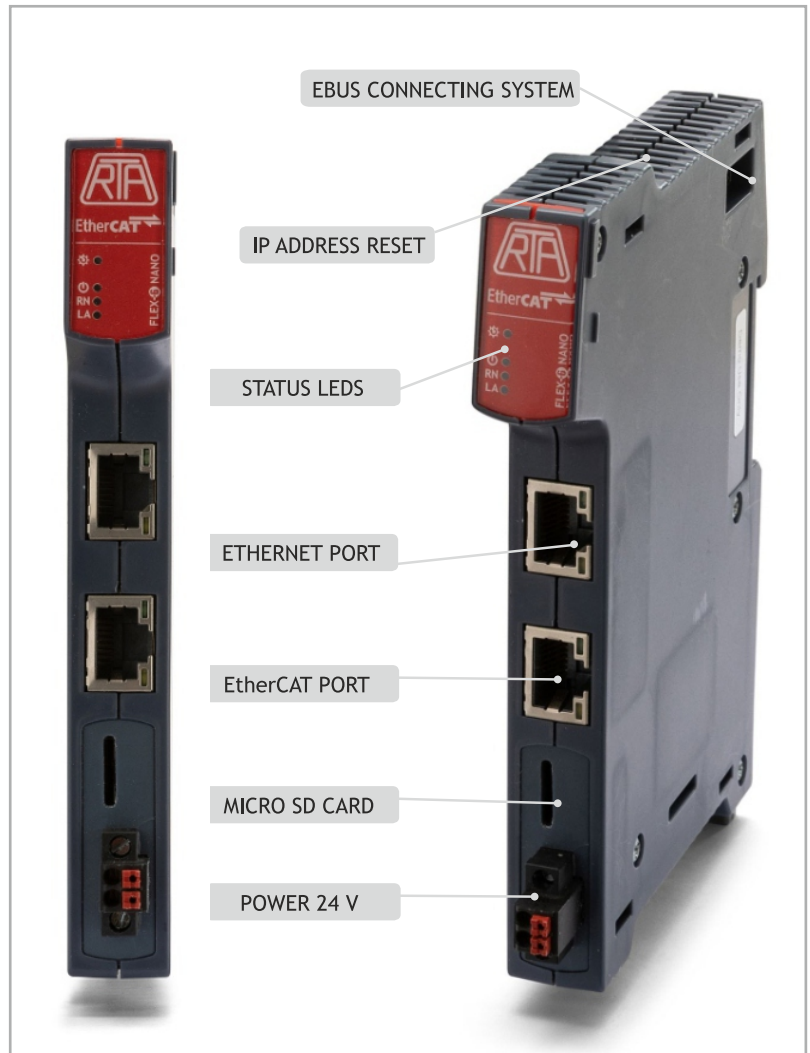

HIGHLIGHTS

- Dual core 1GHZ Arm Processor
- 2 - 64 stepper and servo axis
- Built in EBus Coupler
- Cycle Time as low as 125us
- Ethercat Protocol to Individual modules using the Ebus System.
- Easy parameter configuration
- Remote placement of the modules from the master if needed.
- DIN-rail mounted

EtherCAT®

POWERFUL
COMPACT
VERSATILE



R.T.A. s.r.l.
Via E. Mattei - Frazz. Divisa
27020 Marcignago (PV) (Italy)
T +39.0382.929.855
F +39.0382.929.150
www.rta.it


R.T.A. Deutschland GmbH
Bublitzter Strasse 34, 40599
Duesseldorf (Germany)
T +49.211.749.668.60
F +49.211.749.668.66
www.rta-deutschland.de

R.T.A. IBERICA
C/Generalitat 22, Local 1
08850 Gava - Barcelona (Spain)
T +34 936.388.805
F +34 936.334.595
www.rta-iberica.es

R.T.A. INDIA Pvt
Teerth Business Center 3rd Floor, Unit No. 7,
Block EL-15, MIDC Bhosari Pimpri-Chinchwad,
Pune 411026 (India)
Tel. +91 9422507445
www.rta-india.in

SPECIFICATIONS

- Multitasking Operating System
- Comprehensive Motion Library
- TrioBasic Motion Language
- IEC61131-3 Programming
- HMI Support
- Robotic Functions
- Multi-protocol Communications Support

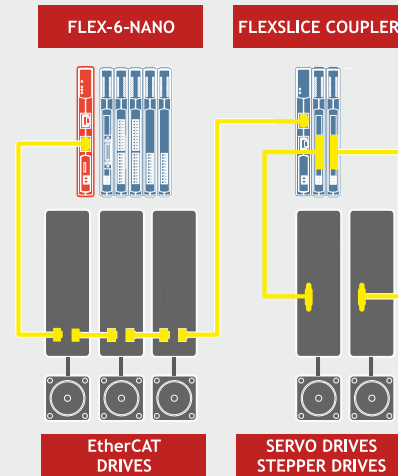



EtherCAT®

TECHNICAL FEATURES

- Dual core 1 GHZ Arm Processor.
- 1 Gbit DDR3 Memory.
- 1 Gbit Fast Serial Flash Memory to store data.
- Built-in Long Time Retention RTC.
- Built-in Ethercat coupler for direct access to Flexslice modules.
- Completely field programmable with *Motion Perfect*.
- Bus cycle time synchronised with *Motion Coordinator Servo Period*.
- EtherCAT protocol remains intact down to individual modules using the EBUS system.
- I/O functions tightly synchronised to motion using EtherCAT distributed clock.
- Practical Push-In connector options.
- RoHS and UL approved.



MECHANICAL DIMENSIONS

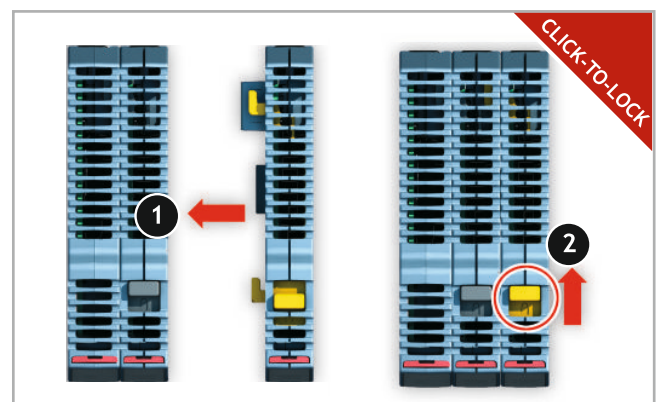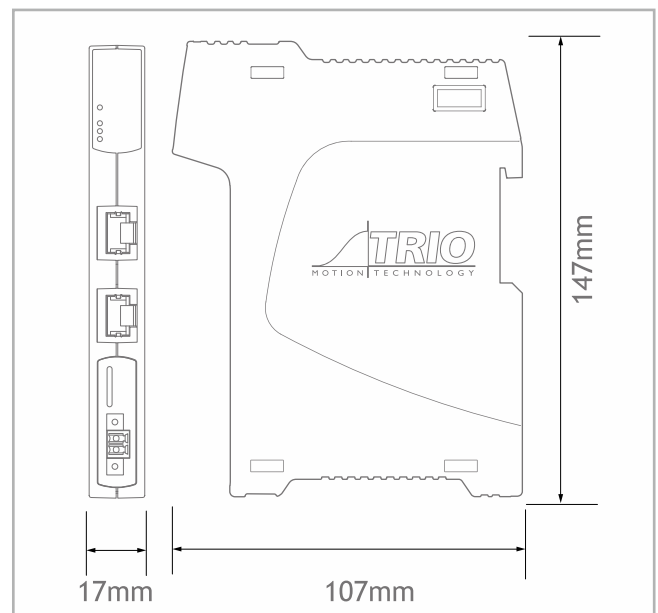

R.T.A. s.r.l.
Via E. Mattei - Frazz. Divisa
27020 Marcignago (PV) (Italy)
T +39.0382.929.855
F +39.0382.929.150
www.rta.it

R.T.A. Deutschland GmbH
Bublitzter Strasse 34, 40599
Duesseldorf (Germany)
T +49.211.749.668.60
F +49.211.749.668.66
www.rta-deutschland.de

R.T.A. IBERICA
C/Generalitat 22, Local 1
08850 Gava - Barcelona (Spain)
T +34 936.388.805
F +34 936.334.595
www.rta-iberica.es

R.T.A. INDIA Pvt
Teerth Business Center 3rd Floor, Unit No. 7,
Block EL-15, MIDC Bhosari Pimpri-Chinchwad,
Pune 411026 (India)
Tel. +91 9422507445
www.rta-india.in