

BSD Series Drives



INTRODUCTION

- New series of microstep stepping motor drives specifically developed for small and mid-size stepping motors.
- Ultra-compact and optimized design to reduce space and cost, combined with *Adaptive Microstepping* technology ensuring noise and vibration suppression.
- Target: simple and effective motion control solutions requiring low power, high precision, smoothness of movement and low acoustic noise.
- Ideal solution to replace integrated circuits and self-made, low power drives. The perfect choice for small routers, medical, 3D printers and all types of compact machines.

HIGHLIGHTS

- Full digital microstepping drive.
- Adaptive microstepping up to 3.200 step/rev.
- Intelligent management of the current profile that achieves good results in terms of smoothness of movement, low noise and vibration control.
- A highly sophisticated control system, preserving anyhow the traditional ease of use of R.T.A. drives.

Series	Model	V _{DC} range (Volt)	I _{NP} min. (Peak value) (Amp)	I _{NP} max. (Peak value) (Amp)	Dimensions (mm)
BSD	02 - 02.V*	24 to 48	0.7	2.2	78x68x21

* BSD 02.V version is equipped with screw-type connectors.



R.T.A. s.r.l.
Via E. Mattei - Fraz- Divisa
27020 Marcignago (PV) (Italy)
T +39.0382.929.855
F +39.0382.929.150
www.rta.it

R.T.A. Deutschland GmbH
Bublitzter Strasse 34, 40599
Duesseldorf (Germany)
T +49.211.749.668.60
F +49.211.749.668.66
www.rta-deutschland.de

R.T.A. IBERICA
C/Generalitat 22, Local 1
08850 Gava - Barcelona (Spain)
T +34 936.388.805
F +34 936.334.595
www.rta-iberica.es


R.T.A. INDIA Pvt
Teerth Business Center 3rd Floor, Unit No. 7,
Block EL-15, MIDC Bhosari Pimpri-Chinchwd,
Pune 411026 (India)
Tel. +91 9422507445
www.rta-india.in

TECHNICAL FEATURES

- Range of operating voltage: 24-48 V_{dc}.
- Range of current: 0.7-2.2 Amp. Setting up to four possible values by means of dip-switches.
- Microstepping: 400, 800, 1.600 and 3.200 steps/revolution. Setting by means of dip-switches.
- Automatic current reduction at motor standstill.
- Management of the current profile setting by means of a dip-switch.
- Protections:
 - Protection against under-voltage.
 - Protection against a short-circuit at motor outputs.
- Electronic damping facility for further acoustic noise and mechanic vibrations reduction.
- Available version: open frame, crimp-type/screw-type connectors.
- Maximum compactness.
- Warranty: 24 months.



POWER AND LOGIC CONNECTIONS

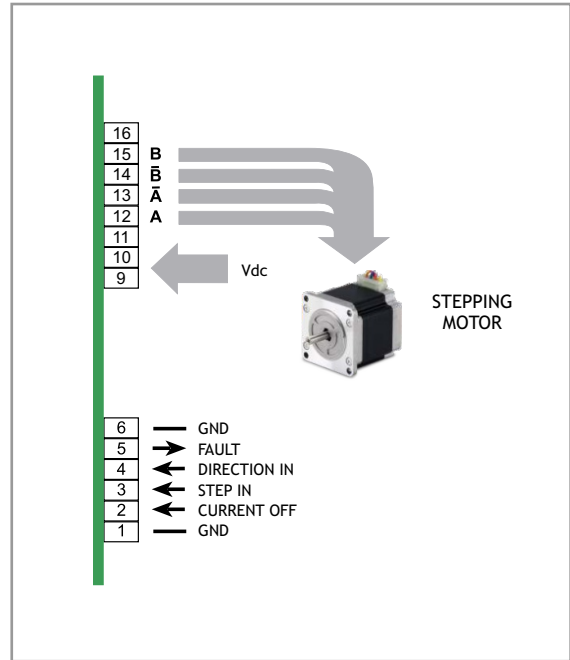

MECHANICAL DIMENSIONS

TRADITIONAL DRIVER

-30%!

BSD DRIVER

REAL DIMENSIONS

Dimensions in millimeters - In scale.



R.T.A. s.r.l.
Via E. Mattei - Frazz. Divisa
27020 Marcignago (PV) (Italy)
T +39.0382.929.855
F +39.0382.929.150
www.rta.it

R.T.A. Deutschland GmbH
Bublitzstrasse 34, 40599
Duesseldorf (Germany)
T +49.211.749.668.60
F +49.211.749.668.66
www.rta-deutschland.de

R.T.A. IBERICA
C/Generalitat 22, Local 1
08850 Gava - Barcelona (Spain)
T +34 936.388.805
F +34 936.334.595
www.rta-iberica.es

R.T.A. INDIA Pvt
Teerth Business Center 3rd Floor, Unit No. 7,
Block EL-15, MIDC Bhosari Pimpri-Chinchwad,
Pune 411026 (India)
Tel. +91 9422507445
www.rta-india.in