



Dimensions (Unit:mm)

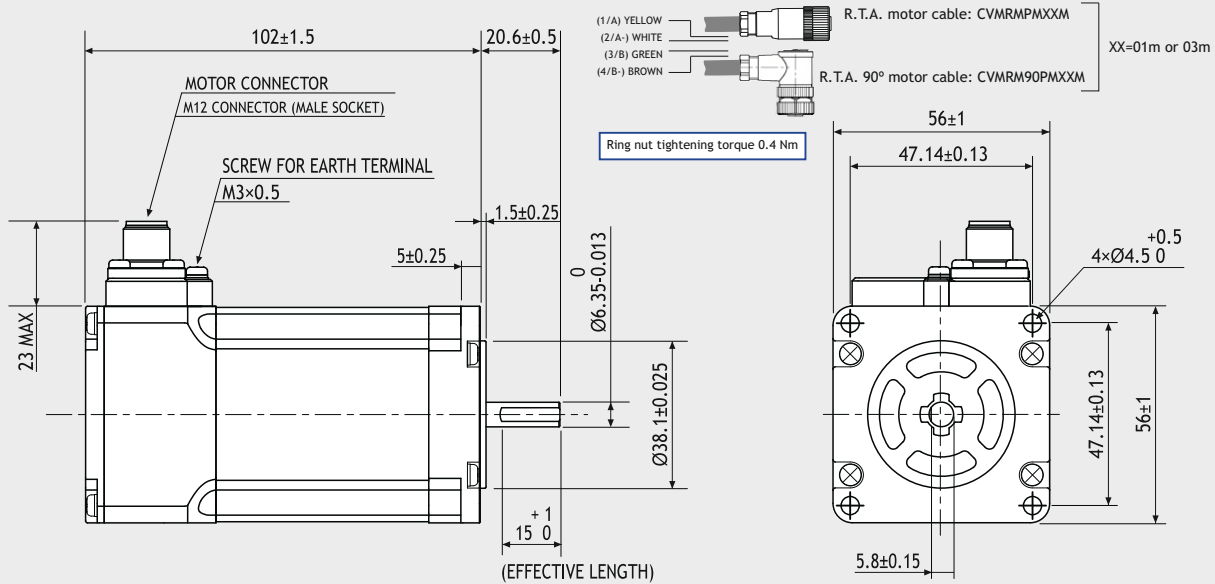

FEATURES

| MODEL | SP2566-5000 |
|---|--|
| BASIC STEP ANGLE | 1.8° ± 0.09° |
| BIPOLAR CURRENT (Amp) | 1.0 |
| RESISTANCE (Ohm) | 7.7 |
| INDUCTANCE (mH) | 35.4 |
| BIPOLAR HOLDING TORQUE (Ncm) | 170 |
| ROTOR INERTIA (Kg·m ² × 10 ⁻⁷) | 360 |
| THEORETICAL ACCELERATION (rad × sec. ⁻²) | 47200 |
| BACK E.M.F. (V/Krpm) | 160 |
| MASS (Kg) | 1.2 |
| INTERNATIONAL STANDARDS | UL, CSA, CE, RoHS |
| INSULATION VOLTAGE (V) | 250 V _{ac} (350 V _{dc}) |
| INSULATION CLASS | F |
| LEADS CODE | V |

TORQUE/SPEED CURVE

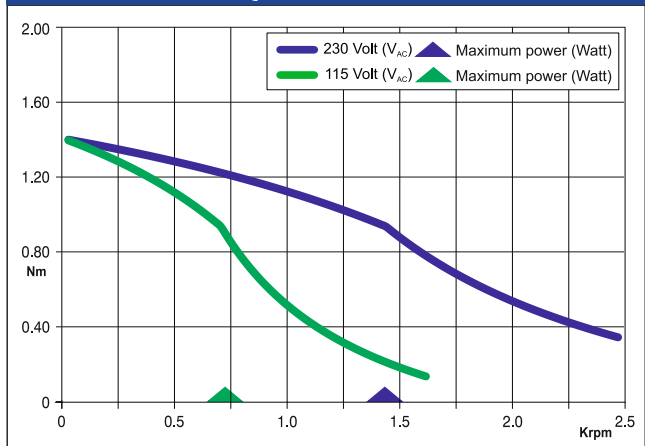

R.T.A. s.r.l. PAVIA (ITALY) SANYO DENKI CO.,Ltd (JAPAN)



Suggested R.T.A. driver: X-PLUS B2



R.T.A. s.r.l.
Via E. Mattei - Fraz. Divisa
27020 MARCIGNAGO (PV) ITALY
Tel. +39.0382.929.855
Fax +39.0382.929.150
www.rta.it

R.T.A. Deutschland GmbH
Bublitzer Straße 34
40599 DÜSSELDORF (Germany)
Tel. +49.211.749.668.60
Fax +49.211.749.668.66
www.rta-deutschland.de

R.T.A. IBERICA-Motion Control Systems S.L.
C/Generalitat 22, Local 1.
08850 GAVA - BARCELONA (Spain)
Tel. +34.936.388.805
Fax +34.936.334.595
www.rta-iberica.es

R.T.A. INDIA REPRESENTATIVE OFFICE
Teerth Business Center 3rd Floor, Unit No. 7,
Block EL-15, MIDC Bhosari Pimpri-Chinchwad,
Pune 411026 (India)
Tel. +91 9422507445
www.rta-india.in