


SS2422-5041

PANCAKE
TYPE
motor

SANYO DENKI
SANMOTION


Dimensions (Unit:mm)

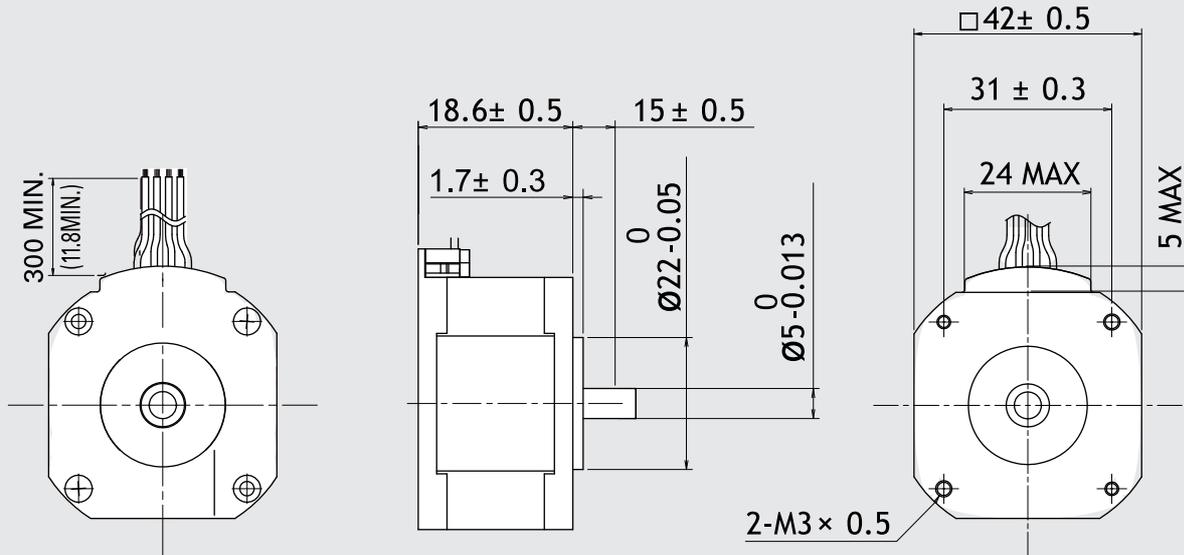

FEATURES

MODEL	SS2422-5041 (SS2422-5011)	
BASIC STEP ANGLE	1.8° ± 0.09°	
BIPOLAR CURRENT	(Amp)	1.0
UNIPOLAR CURRENT	(Amp)	
RESISTANCE	(Ohm)	5.4
INDUCTANCE	(mH)	2.9
BIPOLAR HOLDING TORQUE	(Ncm)	18.6
UNIPOLAR HOLDING TORQUE	(Ncm)	
ROTOR INERTIA	(Kg ^m 2 x 10 ⁻⁷)	0.028
THEORETICAL ACCELERATION	(rad x sec. ⁻²)	63000
BACK E.M.F.	(V/Krpm)	18
MASS	(Kg)	0.14

TORQUE/SPEED CURVE

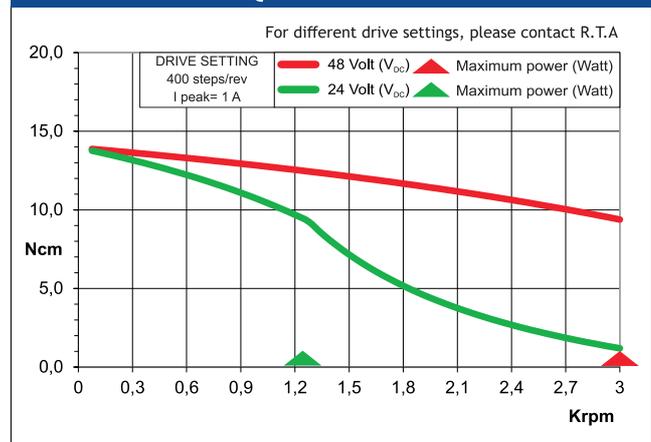

Suggested driver: contact R.T.A.



R.T.A. s.r.l.
Via E. Mattei - Fraz. Divisa
27020 MARCIGNAGO (PV) ITALY
Tel. +39.0382.929.855
Fax +39.0382.929.150
www.rta.it

R.T.A. Deutschland GmbH
Bublitzer Straße 34
40599 DÜSSELDORF (Germany)
Tel. +49.211.749.668.60
Fax +49.211.749.668.66
www.rta-deutschland.de

R.T.A. IBERICA-Motion Control Systems S.L.
C/Generalitat 22, Local 1.
08850 GAVA - BARCELONA (Spain)
Tel. +34.936.388.805
Fax +34.936.334.595
www.rta-iberica.es

R.T.A India Pvt
Flat n. 201, Wind Residency
Vishal Nagar, D.P. Road, Pimple Nilakh,
411027 Pune (India)
Tel. +91.9422507445
www.rta-india.in